


TEMPERATURE PROBES

with type K thermocouple for thermometers
C0311, D0311, C0321, D0321 and data loggers MS6D, MS6R, MS5


Probe tolerances: class 1 in accordance with IEC584-2 $\pm 1.5^{\circ}\text{C}$ or $\pm 0.004 \times t$ (whichever is greater)

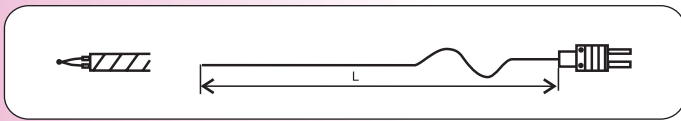


Fast response multi-purpose wire probe
 lengths 1m, 2m, 3m, 4m

- type GD 260** -65 to 260°C teflon insulated, 0.8mm diameter with subminiature male connector
- type GD 700** -65 to 700°C duplex insulated - glass, 2mm diameter with subminiature male connector
- type GD 1250** -65 to 980°C duplex insulated - Nextel ceramic, 4mm diameter with subminiature male connector
- type GD 260/0** -65 to 260°C teflon insulated, 0.8mm diameter, connection end - uninsulated wires for MS5 logger
- type GD 700/0** -65 to 700°C duplex insulated - glass, 2mm diameter, connection end - uninsulated wires for MS5
- type GD 1250/0** -65 to 980°C duplex insulated - Nextel ceramic, 4mm diameter, connection end - uninsulated wires for connection to MS5


SNPO4 self-adhesive labels 25x40 mm to secure wire probes to surfaces, temperature range -70 to 260°C, package of 20 labels




Fast response surface probe
 for flat surface
type CP 500 -65 to 500°C




Fast penetration needle probe
 for soft materials
type CZ 550 -65 to 550°C




Penetration needle probe
 for soft materials
type CZ 900 -65 to 1000°C



Insertion probe
 for fluids and gases
type GT1150 -50 to 1150°C



SNPO3 extension cable type "K"
 with connectors up to 200°C,
 duplex insulated.
 Please specify length.



SNPO3/0 extension cable type "K"
 with one female connector up to 200°C,
 duplex insulated.
 For monitoring system MS5.
 Please specify length.



Subminiature connector up to +200°C
 for thermocouples J, K, S
 (please specify thermocouple type)
 male, female




type CZ900



type CP500



types GD 700, GD 1250



type GD 260



SNPO3/0 extension cable